


# MINDEO



1D 2D

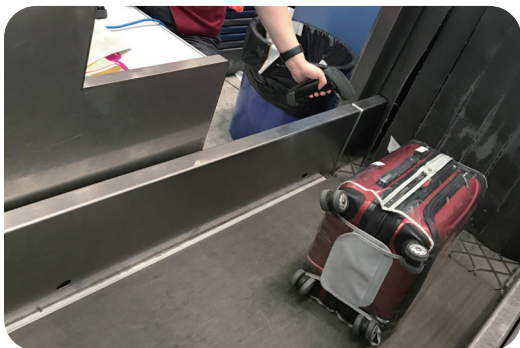

## CS2290-BT Cordless Image Scanner

### Features

- 1 Stylish and ergonomic design, small base saves installation space
- 2 Read all common 1D/2D barcodes from paper labels and electronic screens
- 3 Working range reaches up to 30 meters
- 4 Bluetooth is compatible with 4.2/3.0/2.1+EDR standard
- 5 Support batch mode capability (5000 EAN-13 barcodes)
- 6 Built-in rechargeable & replaceable battery, one full charge supports scanning for 25 hours or standby for 60 hours
- 7 Brand-new, easy wireless communication setting method guarantees convenient operation
- 8 Support vibration mode, ideal for both noisy and quiet environment
- 9 Soft white auxiliary lighting and green aiming cursor deliver comfortable and convenient scanning experience



# CS2290-BT Specifications

Communication Characteristics			
Working Range	30 meters (open air)		
Radio Link	2.4-2.5 GHz, Bluetooth 4.2, Class 2		
Mechanical Characteristics			
Dimensions (L × W × D)	Handheld unit: 90.2 mm × 70 mm × 180 mm; Cradle: 118 mm × 89.5 mm × 74 mm		
Weight	Handheld unit: 225 g; Cradle: 140 g (without cable)		
Indicator	Handheld unit: LED, beeper, vibration; Cradle: LED		
Interface	USB Keyboard, USB Virtual COM, RS232, PS/2 Keyboard		
Electrical Characteristics			
Input Voltage	DC 5 ± 0.25 V		
Current	Handheld unit: 45 mA (standby), 600 mA (working) Cradle: 60 mA (working), 500 mA (charging, maximum)		
Battery	2600 mAh Lithium-ion battery		
Charge Time	6 hours		
Standby Time	60 hours		
Operating Time	25 hours (1 scan per 5 seconds)		
Performance Characteristics			
Image Size	1280 × 800 pixels		
Field of View	Horizontal: 42°, vertical: 26.5°		
Scanning Angle	±70°, ±75°, 360° (Skew, Pitch, Roll)		
Print Contrast	20% minimum reflectance difference		
Decoding Capability	1D: UPC-A, UPC-E, UPC-E1, EAN-13, EAN-8, ISBN (Bookland EAN), ISSN, Code 39, Code 39 full ASCII, Code 32, Trioptic Code 39, Interleaved 2 of 5, Industrial 2 of 5, Matrix 2 of 5, Codabar (NW7), Code 128, UCC/EAN 128, ISBT 128, Code 93, Code 11 (USD-8), MSI/Plessey, UK/Plessey, China Post, China Finance, GS1 DataBar (formerly RSS) variants 2D: PDF417, MicroPDF417, QR Code, Aztec Code, HanXin Code, DataMatrix, Micro QR, Coda block F Code, Maxicode		
Minimum Resolution	HD: 1D (Code 39): 3 mil, 2D (QR): 5 mil SR: 1D (Code 39): 4 mil, 2D (PDF417): 6.7 mil		
Decoding Depth		High density series (HD)	Standard range series (SR)
	3 mil Code39 (3 chars)	10 mm – 61 mm	/
	4 mil Code 128 (9 chars)	5 mm – 88 mm	55 mm – 106 mm
	13 mil UPC (6 chars)	0 mm – 179 mm	0 mm – 335 mm
	20 mil Code39 (1 char)	10 mm – 253 mm	8 mm – 480 mm
	5 mil QR (40 chars)	7 mm – 65 mm	/
	6.7 mil PDF417 (20 chars)	0 mm – 105 mm	37 mm – 145 mm
	10 mil QR (20 chars)	0 mm – 134 mm	0 mm – 168 mm
20 mil QR (20 chars)	0 mm – 215 mm	0 mm – 345 mm	
Environmental Characteristics			
Temperature	0° to 50°C (32° to 122°F), operating; -40° to 60°C (-40° to 140°F), storage		
Humidity	5% to 95% (non-condensing)		
Safety	EMC: EN55032, EN55035   Electrical Safety: EN62368-1   Photobiological Safety: EN62471:2008 Illumination: 0~100,000 LUX   Protection Class: IP51   Drop Resistance: Withstands multiple 1.5 m (5 ft.) drops to concrete		

[Notice]: Specifications are subject to change without notice.